

GC077



CompactTracker

COMPACT GPS TRACKING DEVICE FOR LONG-TERM MONITORING, WITH USB OR CABLE CHARGING OPTIONS

USAGE AND CHARACTERISTICS

- » For tracking and security of motorcycles, vehicles, parcels, luggage etc.
- » Location and tracking at preselected time interval
- » Monitoring of temperature, vibration and tilt
- » G-shock warning
- » Monitoring of analogue input values and binary input state - on/off
- » Compact design and dimensions
- » Waterproof and robust
- » Charging by cable, USB connector or inductive charging
- » Battery life up to 12 months

MEASURES AND TRANSMITS

- » GPS & GSM positioning
- » Speed and direction of movement
- » G-shock detection
- » Temperature
- » Altitude
- » Tilting – motorcycle or bike falling detection
- » Battery voltage and status
- » Driver behavior evaluation
- » Vibration histogram



TYPES AVAILABLE

TYPE	GSM	GPS	BATTERY	CHARGING	INPUTS
GC 077 058	2G/3G	✓	3 400 mAh	cable	1 x analog / 1 x binary
GC 077 202	2G	x	3 400 mAh	cable	x
GC 077 218	2G	✓	3 400 mAh	CL connector	x
GC 077 249	2G	✓	3 400 mAh	USB connector	x
GC 077 250	2G	✓	x	x	1 x analog / 1 x binary
GC 077 258	2G	✓	3 400 mAh	cable	1 x analog / 1 x binary

GC077 CompactTracker


COMPACT GPS TRACKING DEVICE FOR LONG-TERM
MONITORING, WITH USB OR CABLE CHARGING
OPTIONS

TECHNICAL PARAMETERS

GSM	QuadBand 2G – 3G	850/900/1800/1900 MHz – 850/900/1800/1900/2100 MHz
	SIM	Micro Sim, Plug-in 1.8 V
	Types of communication	Calling, SMS, GSM Data, GPRS
	Calls	Alarm call
	SMS	Alarm&Info SMS; SMS commands, requests, SMS configuration
	GPRS internet connectivity	Class 12/static & dynamic IP VPN, UDP protocol / 128bit security encryption key / FW upgrade, configuration settings, on-line value reading, report memory reading
GNSS	GPS and Glonass **	66 satellites
ANTENNAS	GPS **, GSM	Internal
BATTERIES*	Type and Capacity	Lilon 3 400 mAh rechargeable
CONSUMPTION	Standby	7 mAh a day
	Sending of GPS position to server **	0.6 mAh single shot
INPUTS	Charging by cable*	Charging 8-35 V / max. 0.5 A@8 V
	USB micro-internal	Charging* / report memory reading / configuration / FW upgrade
	Analog*	Analog value 0-30 V
	Binary*	Binary value (log0 = 0-4V, Log1 = 5–30V)
SENSORS	3 dimensions G sensor	Movement detection / tilt detection / G-shock detection
	Other sensors	Temperature
INTERNAL MEMORY	Flash 512 kB	Capacity 5 000 events or GPS positions
DIMENSIONS	Plastic box	50 x 90 x 20 mm
TEMPERATURE RANGE	Lilon rechargeable batteries	-20 °C up to +60 °C, charging 0 °C up to +60 °C
	Without battery	-25 °C up to +80 °C
PROTECTION CLASS	IP65	Waterproof
WEIGHT	With batteries	50 g

* For types with cable only
** Is not valid for GC 077 202

BATTERY LIFE FOR PRESELECTED TRACKING MODE

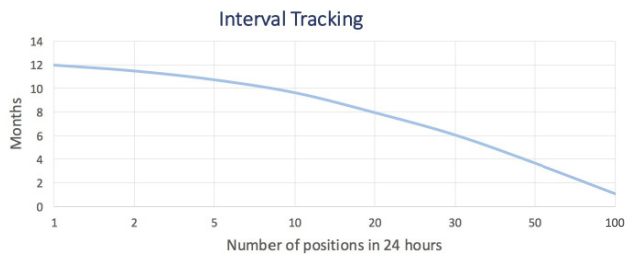

Expected conditions:

- > GPS and GSM signals have no significant obstacles
- > Temperature in range from 15°C up to 25°C
- > Valid for units with battery only



Plhovska 1997, 547 01
Nachod, Czech republic

www.level.systems

tel: +420 491 446 611

fax: +420 491 446 644

email: level@level.systems

Data Box ID: tsjdcq

IC: 474 69 374

DIČ: CZ 474 69 374



EUROPEAN UNION
European Regional Development Fund
Operational Programme Enterprise
and Innovations for Competitiveness

