

# GC095



# TotalTracker

COMPACT GPS TRACKING DEVICE FOR LONG-TERM MONITORING WITH USB OR CABLE CHARGING OPTIONS AND SIMPLE MAGNETIC INSTALLATION

## USAGE AND CHARACTERISTICS

- » For tracking and security of trailers, caravans, machinery and construction equipment.  
Also suitable as an independent GPS unit for the tracking and security of vehicles or motorcycles.
- » Localization and tracking at preselected time interval
- » Monitoring of temperature, acceleration, vibrations, tilting
- » G-shock detection
- » Monitoring of analog input values
- » Monitoring of binary input state - on/off
- » Easy installation by extremely strong magnets
- » Option of fixed installation
- » Charging by cable
- » Battery life up to 24 months (4 positions per day)

## MEASURES AND TRANSMITS

- » Exact position of GPS satellite system
- » GSM cell ID and strength of GSM signal
- » Speed and direction of movement
- » Temperature, air pressure, humidity, altitude
- » Tilting – removal detection
- » Battery voltage and status
- » G-shock alert
- » Analogue input voltage
- » Binary input status
- » Vibration histogram and vibration frequency analysis



## TYPES AVAILABLE

TYPE	GSM	BATTERY	CHARGING	INPUT
GC 095 243	2G	7 800 mAh	USB	x
GC 095 253	2G	7 800 mAh	cable	1 x analog / 1 x binary
GC 095 043	2G/3G	7 800 mAh	USB	x
GC 095 053	2G/3G	7 800 mAh	cable	1 x analog / 1 x binary

## ACCESSORIES

SA 092 000	USB charger 2A (including cable)
------------	----------------------------------

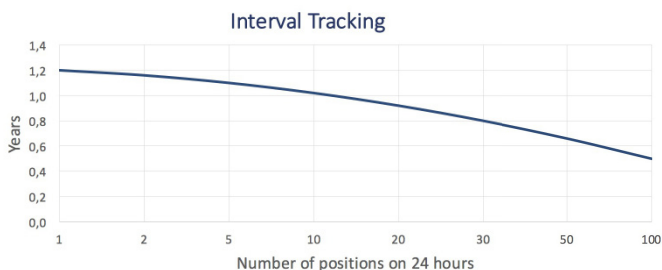
GC095

**TotalTracker**COMPACT GPS TRACKING DEVICE FOR LONG-TERM  
MONITORING WITH USB OR CABLE CHARGING  
OPTIONS AND SIMPLE MAGNETIC INSTALLATION**TECHNICAL PARAMETERS**

<b>GSM</b>	QuadBand 2G – 3G	850/900/1800/1900 MHz – 850/900/1800/1900/2100 MHz
	SIM	Micro Sim, Plug -in 1.8 V
	Types of communication	Calling, SMS, GSM Data, GPRS
	Calls	Alarm call
	SMS	Alarm&Info SMS; SMS commands, requests, SMS configuration
	GPRS internet connectivity	Class 12/static & dynamic IP VPN, UDP protocol / 128bit security encryption key / FW upgrade, configuration settings, on-line value reading, report memory reading, control
<b>GNSS</b>	GPS and Glonass	66 satellites
<b>ANTENNAS</b>	GPS and GSM	Internal
<b>BATTERIES</b>	Type and Capacity	Li-Ion 7 800 mAh rechargeable
<b>CONSUMPTION</b>	Standby	0.2 mAh continuously 24 hours per day
	Sending of GPS position to server	0.6 mAh single shot
	Self-discharge of battery	0.6 mAh continuously (temp. 15 °C – 25 °C)
<b>INPUTS</b>	Charging by cable*	Charging 8-35 V / max. 1 A@8 V
	USB micro **	USB charger 2A - see accessories
	Analog*	Analog value 0-30 V
	Binary*	Binary value (log0 = 0-4 V, Log 1 = 5 – 30 V)
<b>SENSORS</b>	3 dimensions G sensor	Movement detection / tilt detection / vibration histogram / G-shock
	Other sensors	Temperature / humidity / air pressure
<b>INTERNAL MEMORY</b>	Flash 512 kB	Capacity 5 000 events or GPS positions
<b>DIMENSIONS</b>	Plastic box	120 x 80 x 24 mm
<b>TEMPERATURE RANGE</b>	Lilon rechargeable batteries	-25 °C up to +70 °C, charging 0 °C up to +70 °C
<b>PROTECTION CLASS</b>	IP66	Waterproof
<b>WEIGHT</b>	With batteries	220 g

\* For types with cable only

\*\* For types with USB charging only

**BATTERY LIFE FOR PRESELECTED TRACKING MODE**

Expected conditions: > GPS and GSM signals have no significant obstacles  
> Temperature in range from 15°C up to 25°C

**LEVEL**  
SYSTEMSPlhovska 1997, 547 01  
Nachod, Czech republictel: +420 491 446 611  
fax: +420 491 446 644  
email: level@level.systemsData Box ID: tsjdcq  
IČ: 474 69 374  
DIČ: CZ 474 69 374[www.level.systems](http://www.level.systems)  
C 2701 District court  
Hradec Kralove

04/10/20