

TF2

TotalFinder Industrial

HEAVY DUTY GPS MONITORING AND TRACKING UNIT WITH AN UNPRECEDENTED BATTERY LIFE

USAGE AND CHARACTERISTICS

- » Tracking at preselected time interval
- » Monitoring of temperature, acceleration, vibration and tilting
- » G-shock event reporting
- » Bluetooth 5.0 long range for external sensors (optionally)
- » Easy installation by extremely strong magnets
- » Metallic plate holder for rivet installation
- » Battery life up to 12 years (6 positions a day)
- » NB IoT and Cat M1 connectivity (optionally)



MEASURES AND TRANSMITS

- » Exact position of GNSS satellite system
- » GSM cell ID and strength of GSM signal
- » Speed and direction of movement
- » Temperature
- » Tilting - removal detection
- » Battery voltage and status
- » G-shock event reporting
- » Up to 100 values of external long range BT 5.0 sensors

TYPES AVAILABLE

TYPE	GSM	BATTERY	LONG RANGE RECEIVER
TF 200 207	2G	76 000 mAh	-
TF 202 207	2G	76 000 mAh	Bluetooth 5.0
TF 200 007	2G/4G NB-IoT/Cat M1	76 000 mAh	-
TF 202 007	2G/4G NB-IoT/Cat M1	76 000 mAh	Bluetooth 5.0

*for customized solutions please feel free to contact us

ACCESSORIES

BS 010 390	BT temperature sensor
BS 020 130	BT robust temperature sensor
BS 030 380	BT access card
BS 040 540	BT door sensor
MD TF2 001	Metallic plate holder for rivet installation



TF2 TotalFinder Industrial

HEAVY DUTY GPS MONITORING AND TRACKING UNIT WITH AN UNPRECEDENTED BATTERY LIFE

TECHNICAL PARAMETERS

GSM CONNECTIVITY	version 2G	850/900/1800/1900 MHz	
	4G NB-IoT/Cat M1	B1@2100MHz, B3@1800MHz, B8@900MHz, B5@850MHz, B20@800MHz, B28@700 MHz	
	version 4G LTE Cat M1 / NB-IoT/ EGPRS	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28/B39 - for Cat M1 only @LTE 850/900/1800/1900 @EGPRS	
	SIM	embedded SIM Chip	
	Types of communication	GPRS	
	Calls	Alarm call	
	GPRS internet connectivity	Class 12/ static & dynamic IP VPN, UDP protocol / 128bit security encryption key / FW upgrade, configuration settings, on-line value reading, report memory reading, control	
GNSS	GPS, Glonass, Beidou	33 tracking channels, 99 acquisition channels, 210 PRN channels	
ANTENNAS	GPS, GSM, BT 5.0	Internal	
BATTERIES	Type and capacity	76 000 mAh @3,6V	
CONSUMPTION	Standby	4 mAh / day	
	Trackpoint + data sending	1 mAh / each position	
WIRELESS EXTERNAL SENSOR INTERFACE	Bluetooth 5.0 long range	Range up to 250m in free space, 30m in buildings	Connection up to 100 sensors
SENSORS	3 dimensional G sensor	Movement detection / tilt detection / vibration histogram / G-shock	
	Other sensors	Temperature	
INTERNAL MEMORY	Flash 512 kB	Capacity 5000 events or positions	
DIMENSIONS	Plastic box	189 x 88 x 48 mm	
TEMPERATURE RANGE	-35 °C up to +85 °C		
PROTECTION CLASS	IP69	Waterproof	
WEIGHT	With batteries	1 200 g	
STANDARDS	EMC	EN 50121-3-2 ed.4 EN 61000-6-4:2007+A1:2011 EN 55032:2015 EN 55024:2010	
	LVD	EN 62368-1:2014+A11:2017	
	Climatic testing	EN 50155 EN 60068-2-2 EN 60068-2-1 ed.2 EN 60068-2-30 ed. 2	
	Shock and vibration	EN 61373 ed. 2	
	IP code	EN 60529	

BATTERY LIFE

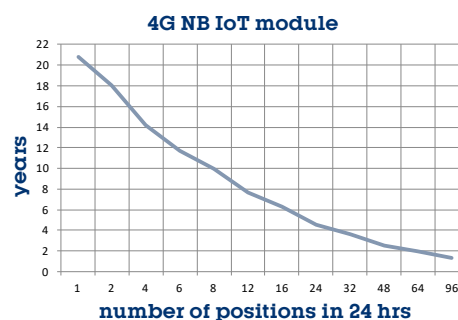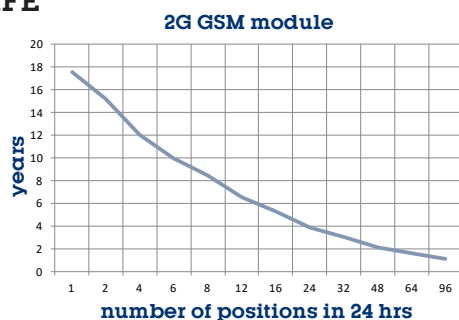

Plhovska 1997, 547 01
Nachod, Czech republic

tel: +420 491 446 611
fax: +420 491 446 644
email: level@level.systems

Data Box ID: tsjdcq
IČ: 474 69 374
DIČ: CZ 474 69 374

www.level.systems
C 2701 District court
Hradec Kralove



08/02/21