

TotalFinder Industrial

HEAVY DUTY GPS MONITORING AND TRACKING UNIT WITH AN UNPRECEDENTED BATTERY LIFE

USAGE AND CHARACTERISTICS

- » Tracking at preselected time interval
- » Monitoring of temperature, acceleration, vibration and tilting
- » G-shock event reporting
- » Battery life up to 12 years (6 positions a day)
- » Easy installation by extremely strong magnets
- » Metallic plate holder for installation by rivets
- » NB IoT and Cat M1 connectivity (optionally)

MEASURES AND TRANSMITS

- » Exact position of GNSS satellite system
- » GSM cell ID and strength of GSM signal
- » Speed and direction of movement
- » Vibration histogram
- » Temperature, acceleration, tilting
- » Tilting - removal detection
- » Battery voltage and status
- » G-shock event reporting



TYPES AVAILABLE*

TYPE	GSM	BATTERY
TF 200 207	2G	76 000 mAh - primary
TF 200 007	2G / 4G NB-IoT/Cat M1	76 000 mAh - primary

*for customized solutions please feel free to contact us

ACCESSORIES



MD TF2 001	Metallic plate holder for rivet installation
------------	--

TotalFinder Industrial

TECHNICAL PARAMETERS

GSM CONNECTIVITY	version 2G	850/900/1800/1900 MHz
	version 4G LTE Cat NB IoT	B1@2100MHz, B3@1800MHz, B8@900MHz, B5@850MHz, B20@800MHz, B28@700 MHz
	version 4G LTE Cat M1 /NB IoT/ EGPRS	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28/B39 - for Cat M1 only @LTE 850/900/1800/1900 @EGPRS
	SIM	embedded SIM CHIP
	Types of communication	GPRS
	Calls	Alarm call
	SMS	Alarm & Info SMS, SMS commands, requests, SMS configuration
	GPRS internet connectivity	Class 12/ static & dynamic IP VPN, UDP protocol / 128bit security encryption key / FW upgrade, configuration settings, on-line value reading, report memory reading, control
GNSS	GPS, Glonass, BeiDou	33 tracking channels, 99 acquisition channels, 210 PRN channels
ANTENNAS	GPS, GSM	Internal
BATTERIES	Type and capacity	LiSOCl ₂ (primary) 76 000 mAh @3,6V
CONSUMPTION	Standby	4 mAh / day
	Trackpoint + data sending	1,5 mAh / each position
SENSORS	3 dimensional G sensor	Movement detection / tilt detection / vibration histogram / G-shock
	Other sensors	Temperature
INTERNAL MEMORY	Flash 512 kB	Capacity 5000 events or positions
DIMENSIONS	Plastic box	189 x 88 x 48 mm
TEMPERATURE RANGE	-35 °C up to +75 °C	
PROTECTION CLASS	IP69	Waterproof
WEIGHT	With batteries	1 200 g
STANDARDS	EMC	EN 50121-3-2 ed.4 EN 61000-6-4:2007+A1:2011 EN 55032:2015 EN 55024:2010
	LVD	EN 62368-1:2014+A11:2017
	Climatic testing	EN 50155 EN 60068-2-2 EN 60068-2-1 ed.2 EN 60068-2-30 ed. 2
	Shock and vibration	EN 61373 ed. 2
	IP code	EN 60529

BATTERY LIFE

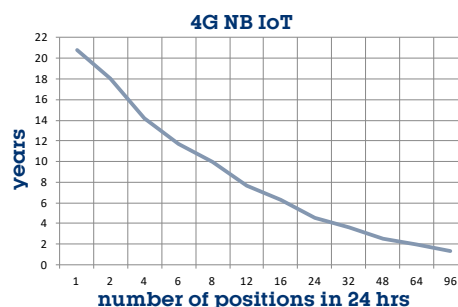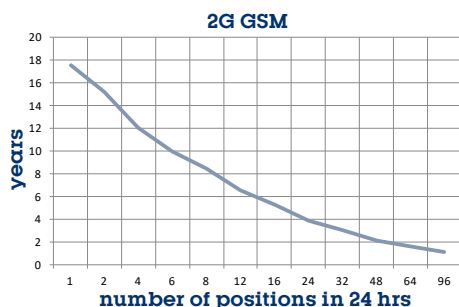

Plhovska 1997, 547 01
Nachod, Czech republic

tel: +420 491 446 611
fax: +420 491 446 644
email: level@level.systems

Data Box ID: tsjdcq
IČ: 474 69 374
DIČ: CZ 474 69 374

www.level.systems
C 2701 District court
Hradec Kralove

