

TotalTracker

COMPACT GPS TRACKING DEVICE FOR LONG-TERM MONITORING WITH USB-C CHARGING AND SIMPLE MAGNETIC INSTALLATION

USAGE AND CHARACTERISTICS

- » GPS device suitable for tracking and security of cars, motorcycles or pallets
- » Localization and tracking at preselected time interval
- » Monitoring of temperature, tilting, altitude
- » Vibration and shock detection using G-sensor
- » Easy installation by extremely strong magnets
- » Option of fixed installation
- » Charging by USB-C
- » Battery life up to 2 years (1 position per day)



MEASURES AND TRANSMITS

- » Exact position according to GNSS satellite system
- » Approximate position from BTS
- » Online tracking of speed and direction of movement
- » Temperature, altitude
- » Tilt + removal detection
- » Battery status
- » G-shock alert

TYPES AVAILABLE*

TYPE	GSM	BATTERY	CHARGING
TT 100 202	2G	7 800 mAh	USB-C
TT 100 002	2G / 4G / NB-IoT / LTE Cat M1	7 800 mAh	USB-C



*for customized solutions please feel free to contact us

TotalTracker

TECHNICAL PARAMETERS

GSM	version 2G	850/900/1800/1900 MHz	
	version 4G NB-IoT	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B71/B85	
	version 4G LTE Cat M1	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B27/B28/B66/B85	
	SIM	Nano Sim, Plug-in 1.8 V	
		SIM Chip	
	Types of communication	Ringing, SMS, GSM Data, GPRS	
	Calls	Alarm call	
	SMS	Alarm&Info SMS; SMS commands, requests, SMS configuration	
GPRS internet connectivity	Class 12/static & dynamic IP VPN, UDP protocol / 128bit security encryption key / FW upgrade, configuration settings, on-line value reading, report memory reading, control		
GNSS	GPS and Glonass	66 satellites	
ANTENNAS	GPS and GSM	Internal	
BATTERIES	Type and Capacity	Li-Ion 7 800 mAh rechargeable	
CONSUMPTION	Standby	4 mAh continuously 24 hours per day	
	Sending of GPS position to server	1 mAh single shot	
	Self-discharge of battery	5 mAh continuously (temp. 15 °C – 25 °C)	
INPUTS	USB-C	USB charger 2A	
SENSORS	3 dimensions G sensor	Movement detection / tilt detection / G-shock	
	Other sensors	Temperature	
INTERNAL MEMORY	Flash 512 kB	Capacity 5 000 events or GPS positions	
DIMENSIONS	Plastic box	120 x 80 x 24 mm	
TEMPERATURE RANGE	Li-Ion rechargeable batteries	-25 °C up to +70 °C, charging +5 °C up to +35 °C	
PROTECTION CLASS	IP66	Waterproof	
WEIGHT	With batteries	220 g	
STANDARDS	EMC	EN 50121-3-2 ed.4 EN 61000-6-4:2007+A1:2011 EN 55032:2015 EN 55024:2010	
	LVD	EN 62368-1:2014+A11:2017	
	Climatic testing	EN 50155 EN 60068-2-2 EN 60068-2-1 ed.2 EN 60068-2-30 ed. 2	
	Shock and vibration	EN 61373 ed. 2	
	IP code	EN 60529	

BATTERY LIFE

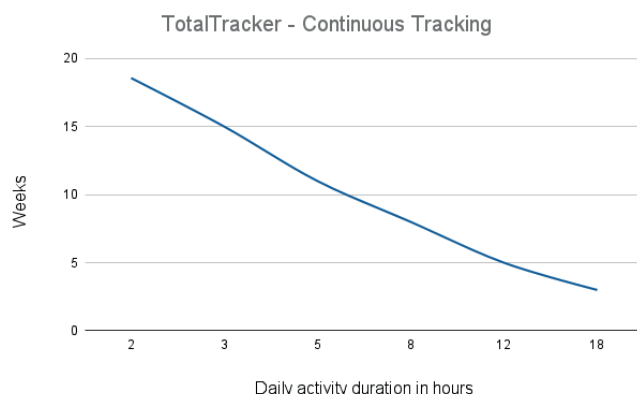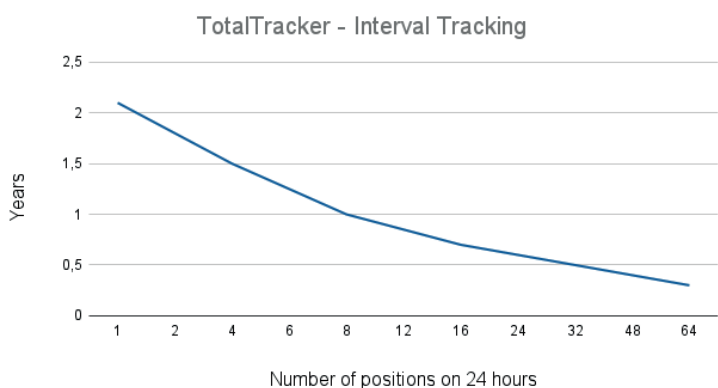

Expected conditions: > GPS and GSM signals have no significant obstacles
> Temperature in range from 15°C up to 25°C



Plhovska 1997, 547 01
Nachod, Czech republic

tel: +420 491 446 611
fax: +420 491 446 644
email: level@level.systems

Data Box ID: tsjldc
IČ: 474 69 374
DIČ: CZ 474 69 374

www.level.systems
C 2701 District court
Hradec Kralove

